

# DETa-1 超弹性筒夹刀柄 3 型

后拉筒夹式 前端无紧锁螺帽

DTA3

螺母紧锁方式

$\phi 10$



BT30, 40  
A63  
E32, 40, 50  
F63  
ST16, 20

DTB3

后拉方式

BT30, 40  
A63  
E25, 32, 40, 50  
F63  
ST12, 16, 20

DETa-1超弹性筒夹

D3



最大 **0.5mm** 的伸缩范围  
使用高镍合金钢  
小巧结实且高精度

DETa-1 超弹性筒夹刀柄 7 型 12 型

1 个筒夹能缩紧 2 mm

DTA 7  
DTA 12

DTB 7  
DTB 12

DTE 7  
DTE 12



$\phi 1 \sim \phi 13$

☒中心通冷

## DETa-1 超弹性筒夹刀柄 DTA3 型



BT30-DTA3-90

Fig.1

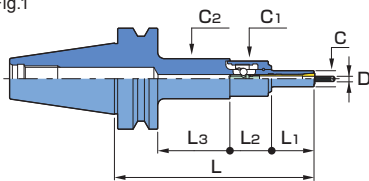


Fig.2





Fig.3






平衡☒  
(g·mm)

编码	Fig.	$\phi D$	L	$\phi C$	L <sub>1</sub>	L <sub>2</sub>	L <sub>3</sub>	$\phi C_1$	$\phi C_2$	$\phi D_1$	Kg	N		
BT30-DTA3- 90	1	$\phi 0.5 \sim 3.175$	90	10	27	26	15	22	25	—	0.5	2.4		
BT40-DTA3- 95			95								1.1	3.9		
-125			125								1.2	4.3		
A 63-DTA3- 90	2	$\phi 0.5 \sim 3.175$	90	10	27	26	11	22	25	—	0.8	3.0		
-120			120								41	1.0	3.4	
E 32-DTA3- 75			75								2	0.2	1.8	
E 40-DTA3- 75													0.3	1.7
E 50-DTA3- 80			80								1	0.5	2.1	
F 63-DTA3- 90			90								11	0.8	2.3	
-120			120								41	0.9	2.7	
ST16-DTA3			3								$\phi 0.5 \sim 3.175$	60	10	27
ST20-DTA3	20	—		—										

■选购品 · DETA-1超弹性筒夹 · 扳手 · 拉钉 · 清洁用具 ■标准附属品 · 冷却导管 (HSK-A) · 销杆

# DETa-1 超弹性筒夹刀柄 DTB3 型

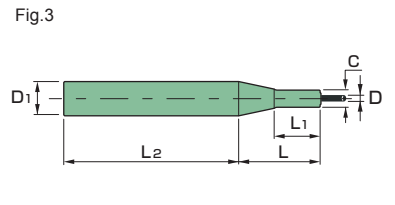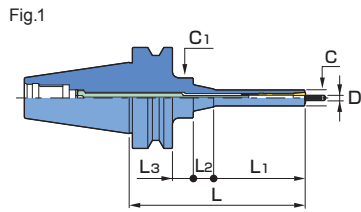


平衡值  
(g·mm)

编码	Fig.	$\phi D$	L	$\phi C$	L <sub>1</sub>	L <sub>2</sub>	L <sub>3</sub>	$\phi C_1$	$\phi C_2$	$\phi D_1$	kg	N		
BT30-DTB3-90	1	$\phi 0.5 \sim 3.175$	90	10	27	13	28	25	-	-	0.6	1.7		
BT40-DTB3-80			80				13				1.3	2.8		
110			110				43				1.4	3.2		
-110-L			57				13				1.3	2.8		
A 63-DTB3-75	2	$\phi 0.5 \sim 3.175$	75	10	27	13	4	25	43	-	0.8	6.9		
-105			105				34				0.9	7.5		
-105-L			57				4				0.8	7.0		
E 25-DTB3-58			58				27				16	4.6	18	18
E 32-DTB3-65	65	4.5	20	20	0.2	0.6								
E 40-DTB3-70	70	27	13	-	-	-	0.3	0.9						
E 50-DTB3-75	75		16	1.5	34	0.5	1.7							
F 63-DTB3-75	2	$\phi 0.5 \sim 3.175$	105	10	27	13	4	25	43	-	0.8	2.1		
-105											34	0.9	2.5	
-105-L											57	4	0.8	2.1
ST12-DTB3											3	$\phi 0.5 \sim 3.175$	29	10
ST16-DTB3	38.5	27	81.5	16	-	-								
ST20-DTB3	48			102	20	-	-							


■选购品 · DETA-1超弹性筒夹 · 扳手 · 销杆 · 清洁用具 ■标准附属品 · 冷却导管 (HSK-A)

## DETa-1 超弹性筒夹 (D3)

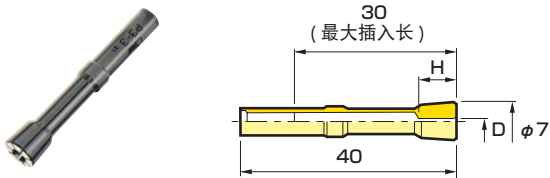

超弹性筒夹偏摆精度



超精密	3 $\mu m$
准	5 $\mu m$



编码		$\phi D$	H
超精密级	标准级		
D3-0.6-P	D3-0.6	0.5~0.6	6.9
-0.8-P	-0.8	0.6~0.8	
-1-P	-1	0.8~1	7
-1.5-P	-1.5	1~1.5	7.2
-2-P	-2	1.5~2	7.3
-2.5-P	-2.5	2~2.5	7.4
-3-P	-3	2.5~3	7.6
-3.175-P	-3.175	2.7~3.175	


### 扳手

编码	Fig.	刀柄形式	紧缩扭力
F -22	1	DTA3	2~3N·m
DW-2.5-110	2	DTB3	



### 销杆

编码	刀柄形式	数量
PR-DTA3	DTA3	2



DTA3 型的D3 超弹性筒夹

### 清洁用具

编码	数量
PCT01-10	10
-25	25



请用于刀柄内部清洁