


平面铣刀架 FMH强力型 (FMH-H)

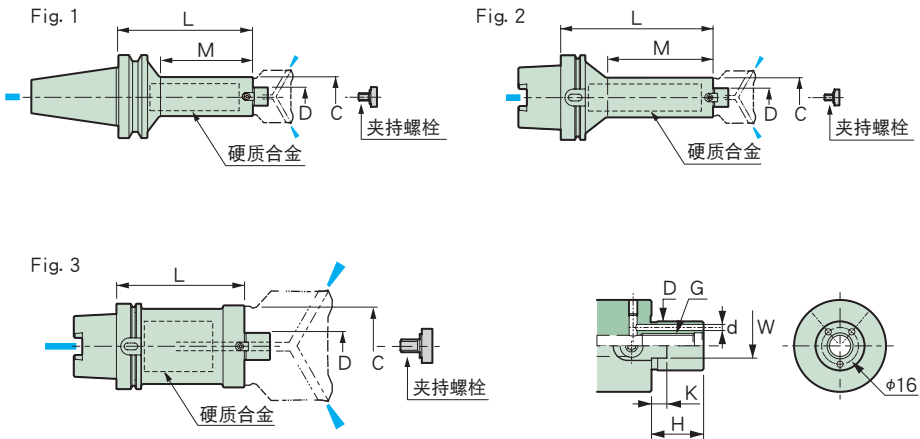

型号	Fig.	L	M	Kg	力矩 kgf·m
BT50-FMH16 -37-125H	1	125	60	5.2	—
-175H		175	110	5.8	
NEW -225H		225	160	6.5	
-275H		275	210	7.1	
-325H		325	260	7.8	
BT50-FMH22 -47-165H	1	165	110	5.7	0.1
-215H		215	160	6.5	0.2
-265H		265	210	7.3	0.3
-315H		315	260	8.2	0.6
-365H		365	310	9.0	0.8
BT50-FMH22 -60-165H	1	165	110	6.9	0.2
-215H		215	160	8.1	0.3
-265H		265	210	9.3	0.6
-315H		315	260	10.7	1.0
-365H		365	310	11.9	1.3
-415H		415	360	13.1	1.7
BT50-FMH31.75-76-215H	1	215	160	10.6	0.6
-265H		265	210	12.7	1.0
-315H		315	260	15.3	1.5
-365H		365	310	17.6	2.3
A100-FMH16 -37-125H	1	125	60	3.9	—
-175H		175	110	4.5	
NEW -225H		225	160	5.2	
-275H		275	210	5.8	
-325H		325	260	6.4	
A100-FMH22 -47-165H	2	165	110	4.2	0.1
-215H		215	160	5.1	0.3
-265H		265	210	5.9	
-315H		315	260	6.8	0.6
-365H		365	310	7.6	0.8
A100-FMH22 -60-165H	2	165	110	5.9	0.2
-215H		215	160	7.2	0.5
-265H		265	210	8.4	0.7
-315H		315	260	9.8	1.1
-365H		365	310	11.1	1.4
-415H		415	360	12.4	1.8
A100-FMH31.75-76-215H	2	215	160	9.7	0.7
-265H		265	210	11.8	1.2
-315H		315	260	14.0	1.7
-365H		365	310	16.3	2.4
A100-FMH31.75-96-250H	3	250	—	13.6	1.3
-300H		300		16.3	2.0
-350H		350		17.4	2.6

■通用尺寸

型号	刀径	φD	H	φC	W	K	φd	G	夹持螺栓
FMH16 -37	40	16	17	37	8	5	2	M 8	M 8※
FMH22 -47	50/52	22	18	47	10	5	3	M10	M10※
FMH22 -60	63/66	22	18	60	10	5	3	M10	M10※
FMH31.75-76	80	31.75	30	76	12.7	7	4	M16	MBF-M16
FMH31.75-96	100	31.75	30	96	12.7	7	4	M16	MBF-M16

- 选购品
- 拉钉(BT50)→P.71
- 标准附属品
- 冷却液导管固定式(HSK)→P.111
 - 夹持螺栓(表格中含※标记除外)
 - 止动键
- 备考
- 可动式冷却液导管(HSK-A)。详细请垂询。
 - 表格中含※标记的紧固螺栓为内六角螺栓。请使用市面销售的产品。
 - 对于是否可以安装各个品牌的刀盘, 请向弊司垂询。
- 注意事项
- 紧固螺栓会随着刀盘的品牌和型号不同形状也会发生变化。