

# DETa-1 콜렛홀더 3형

풀링 방식의 콜렛으로 끝단에 너트가 없음

## DTA3

너트 체결 방식

$\phi 10$

$\phi 0.5 \sim 3.175$

BT30, 40  
A63  
E32, 40, 50  
F63  
ST16, 20

## DTB3

콜렛 조임 방식

BT30, 40  
A63  
E25, 32, 40, 50  
F63  
ST12, 16, 20

### DETa-1 콜렛 D3



최대 0.5mm의 체결대

마르에이징 강철 채용!

초소형 디자인과 고강성 · 고정밀도

### DETa-1 콜렛홀더 12형

1 개의 콜렉트로 2mm 조인다!

DTA 7  
DTA12

DTB 7  
DTB12

DTE 7  
DTE12

$\phi 1 \sim \phi 13$

관통 콜렛 대응

## DETa-1 콜렛홀더 DTA3형



BT30-DTA3-90

Fig.1

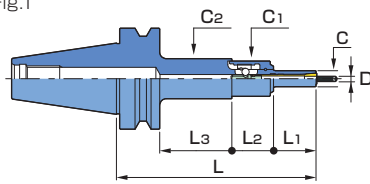


Fig.2





Fig.3






밸런스값  
(g·mm)

코드	Fig.	$\phi D$	L	$\phi C$	L <sub>1</sub>	L <sub>2</sub>	L <sub>3</sub>	$\phi C_1$	$\phi C_2$	$\phi D_1$	Kg	N	
BT30-DTA3- 90	1	$\phi 0.5 \sim 3.175$	90	10	27	26	15	22	25	-	0.5	2.4	
BT40-DTA3- 95			95								1.1	3.9	
-125			125								1.2	4.3	
A 63-DTA3- 90	2	$\phi 0.5 \sim 3.175$	90	10	27	26	11	22	25	-	0.8	3.0	
-120			120								1.0	3.4	
E 32-DTA3- 75			75								0.2	1.8	
E 40-DTA3- 75											2	0.3	1.7
E 50-DTA3- 80			80								1	0.5	2.1
F 63-DTA3- 90			90								11	0.8	2.3
-120			120								41	0.9	2.7
ST16-DTA3			3								$\phi 0.5 \sim 3.175$	60	10
ST20-DTA3	20	-		-									

■음선 •DETa-1 콜렛 •렌치 •풀스터드 볼트(BT) •클리닝 툴 ■표준 부속품 •콜렛덕트 (HSK-A) •로드

# DETa-1 콜렛홀더 DTB3형

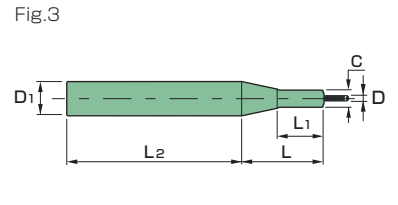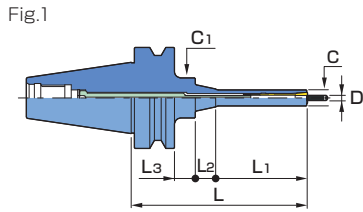


밸런스값  
(g·mm)

코드	Fig.	φD	L	φC	L <sub>1</sub>	L <sub>2</sub>	L <sub>3</sub>	φC <sub>1</sub>	φC <sub>2</sub>	φD <sub>1</sub>	Kg	N				
BT30-DTB3- 90	1	φ0.5~3.175	90	10	27	13	28	25	-	-	0.6	1.7				
BT40-DTB3- 80			80				13				1.3	2.8				
-110			110				43				1.4	3.2				
-110-L			57				13				1.3	2.8				
A 63-DTB3- 75	2	φ0.5~3.175	75	10	27	13	4	25	43	-	0.8	6.9				
-105			105				34				0.9	7.5				
-105-L			57				4				0.8	7.0				
E 25-DTB3- 58			58				27				16	4.6	18	18	0.1	0.4
E 32-DTB3- 65	3	φ0.5~3.175	65	10	27	16	4.5	20	20	-	0.2	0.6				
E 40-DTB3- 70			70				13				-	0.3	0.9			
E 50-DTB3- 75			75				16				1.5	34	0.5	1.7		
F 63-DTB3- 75			105				13				4	25	43	0.8	2.1	
-105	3	φ0.5~3.175	29	10	25	61	-	-	-	12	-	-				
-105-L													57	4	0.8	2.1
ST12-DTB3													27	81.5	16	
ST16-DTB3	3	φ0.5~3.175	38.5	10	27	81.5	-	-	-	20	-	-				
ST20-DTB3			48										102	20		


■음선 ●DETa-1 콜렛 ●렌치 ●폴스터드 볼트(BT) ●클리닝 툴 ■표준 부속품 ●콜렛덕트(HSK-A)

## DETa-1 콜렛홀더 (D3)

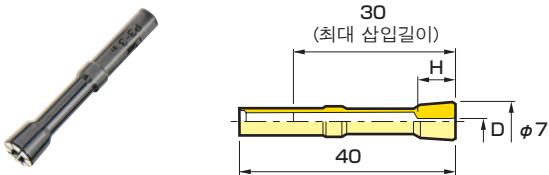

데이터윈 콜렛의 흔들림 정밀도



초정밀	3 μm
표준급	5 μm



코드		φD	H
초정밀	표준급		
D3-0.6-P	D3-0.6	0.5~0.6	6.9
-0.8-P	-0.8	0.6~0.8	
-1 -P	-1	0.8~1	7
-1.5-P	-1.5	1 ~1.5	7.2
-2 -P	-2	1.5~2	7.3
-2.5-P	-2.5	2 ~2.5	7.4
-3 -P	-3	2.5~3	7.6
-3.175-P	-3.175	2.7~3.175	


### 렌치

코드	Fig.	홀더 형식	너트 체결 토크
F -22	1	DTA3	2~3N·m
DW-2.5-110	2	DTB3	



### 로드


코드	홀더 형식	수량
PR-DTA3	DTA3	2



DTA3 형으로 D3 콜렛을 끌어낼어 장착하기 위한 부품입니다.

### 클리닝 툴

코드	수량
PCT01-10	10
-25	25



홀더의 내부 청소에 사용하십시오.